




Rating	16A 125VAC, 10A 250VAC 	Mounting Hole 
	10A 125VAC, 6A 250VAC CQC	
	10(4)A 250V~ 	
Contact Resistance	50m ohm Max.	Thickness:2.0~3.0 
Insulation Resistance	DC 500V 100M ohm Min.	
Dielectric Strength	AC 1500V 1 minute	
Operation Temperature	-25°C~85°C	
Switch Function	3P SPDT ON-OFF-ON	








Material:

Frame: Nylon#66, Black


Actuator: Nylon#66, Black

Printed: White, hot stamping

Circuit Diagram

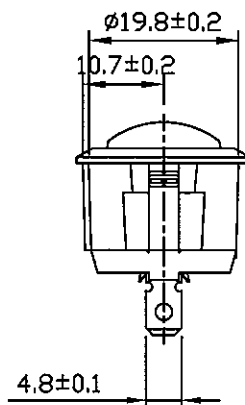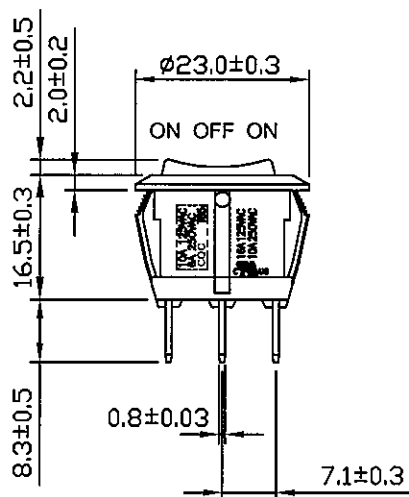

C81R131R13-112D-02(1821351)

04/12/13	曹盈芳	依公司規定追加SCI Logo				△
Date	Name	Description				NO
Drawn	Checked	Approved	SCI BOM NO.	1821351	Model Name	ROCKER SWITCH
曹盈芳			Customer No.		Model No.	R13-112D-02
04/12/13		4/12/13	Unit	mm	Shin Chin Industrial Co., Ltd.	
						Rev. 1