





Rating	16A 125VAC 10A 250VAC		Mounting Hole	
	10A 125VAC 6A 250VAC			
Contact R	50m ohm Max.			
Insulation R	DC 500V 100M ohm Min.			
Dielectric Strength	AC 1500V 1 minute			
Operation Temperature	-20°C~85°C			
Circuit	3P SPST ON-OFF (Illuminated)			

Material:
Frame: Nylon#66
Actuator: PC






Circuit Diagram



Lamp on when load is on

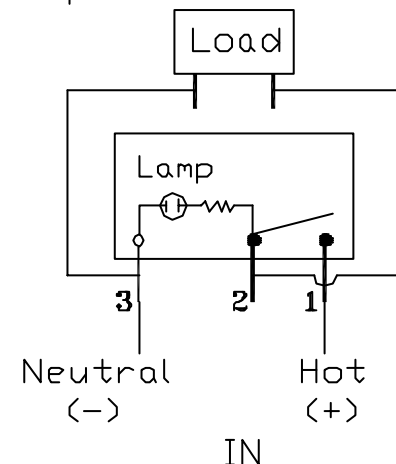

Lamp on at all times

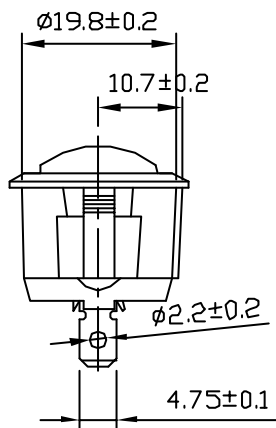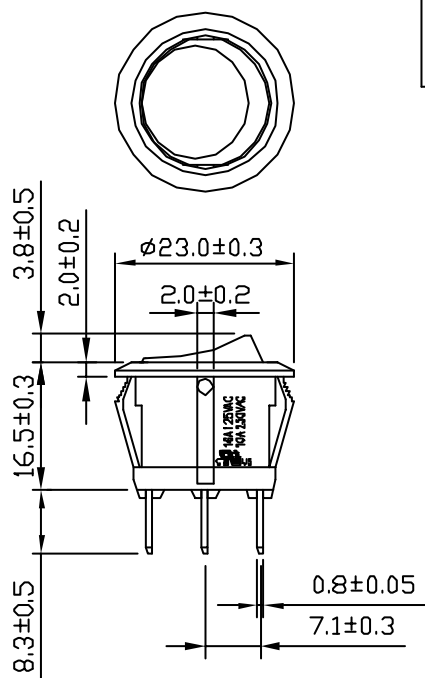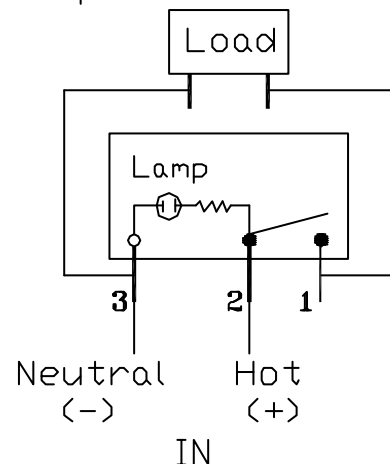

1823178
1822539
1820993
1820866
SCI NO.

C8\R13\R13-112BW-02-(1820866,993,1822539,1823178)

							△
							△
Date	Name	Descriptions					NO
Drawing	Check	Approval	SCI No.	SEE TABLE	Model Name	ROCKER SWITCH	
曹盈芳	王佰山	李景煌	Customer No.		Model No.	R13-112BW-02	
10/25/'06	10/25/'06	10/25/'06	Unit	mm			